


PR 轻型管

PR Light Weight Conduit

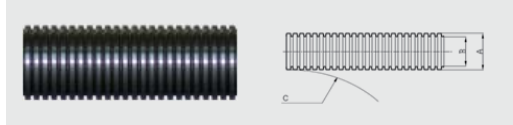

材质：改良尼龙

颜色：黑色

温度：-40°C~+120°C，短时间 150°C

阻燃等级：UL94-V0

防护等级：IP66, IP68(与接头及密封圈配合使用)

特性：柔韧性好，阻燃，低烟毒，低毒，无卤素，很好的抗疲劳性和抗紫外辐射性，自熄灭性好。

应用：自动化设备，船舶设施，运输装置，空气调节装置等

Material: Modified nylon

Colour: Black(BL)

Temperature range: -40°C ~ +120°C, short-term to 150°C

Flame-retardant: UL94-V0

Protection Degree: IP66, IP68(For use with RL fitting & seal)


Properties: High flexibility, fire hazard, low smoke density, low toxicity, halogen free, high UV resistance and high fatigue life, self-extinguishing

Applications: Auto equipment, shipping facilities, transport installation, air-condition equipment etc

软管尺寸 Conduit size	型号 Part no.	外径 A (mm) OD	内径 B (mm) ID	最小弯曲半径 C (mm) Min bend radius	包装 (米 / 卷) Packing
13	PRL-13	13.0	10.3	25	100
16	PRL-16	15.8	12.1	35	50
17	PRL-17	17.0	13.5	35	50
18	PRL-18	18.5	14.8	40	50
21	PRL-21	21.2	17.9	45	50
26	PRL-26	26.0	21.8	50	50
28	PRL-28/F	28.5	23.8	50	50
28	PRL-28/C	28.5	22.6	50	50
34	PRL-34/F	34.5	29.1	60	50
34	PRL-34/C	34.5	29.1	60	50
42	PRL-42	42.5	35.8	65	25
54	PRL-54	54.5	48.1	75	25

PR 标准型管

PR Standard Weight Conduit

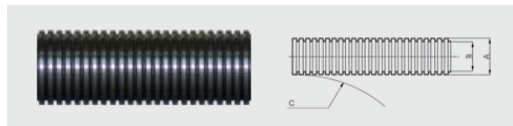

材质：改良尼龙

颜色：黑色

温度：-40°C~+120°C，短时间 150°C

阻燃等级：UL94-V0

防护等级：IP66, IP68(与接头及密封圈配合使用)

特性：柔韧性好，耐磨损，阻燃，低烟毒，低毒，无卤素，很好的抗疲劳性和抗紫外辐射性，自熄灭性好。

应用：机床，机械制造，自动化设备，船舶设施，运输装置，空气调节装置，轨道交通，铁路设施等

Material: Modified nylon

Colour: Black(BL)

Temperature range: -40°C ~ +120°C, short-term to 150°C

Flame-retardant: UL94-V0

Protection Degree: IP66, IP68(For use with RL fitting & seal)

Properties: High flexibility, fire hazard, low smoke density, low toxicity, halogen free, high UV resistance and high fatigue life, self-extinguishing

Applications: Machine tool, mechanical building, auto equipment, shipping facilities, transport installation, air-condition equipment, rail transportation, railway etc

软管尺寸 Conduit size	型号 Part no.	外径 A (mm) OD	内径 B (mm) ID	最小弯曲半径 C (mm) Min bend radius	包装 (米 / 卷) Packing
10	PRS-10	10.0	6.5	15	200
13	PRS-13	13.0	10.1	25	100
16	PRS-16	15.8	11.9	35	50
17	PRS-17	17.0	13.3	35	50
18	PRS-18	18.5	14.6	40	50
21	PRS-21	21.2	17.5	45	50
26	PRS-26	26.0	21.6	50	50
28	PRS-28/F	28.5	23.6	50	50
28	PRS-28/C	28.5	22.5	50	50
34	PRS-34/F	34.5	28.9	60	50
34	PRS-34/C	34.5	28.9	60	50
42	PRS-42	42.5	35.6	65	25
54	PRS-54	54.5	47.9	75	25