


67/68

低烟无卤线槽

Halogen free & Low smoke duct



H (mm)	W (mm)	WDLK 系列 (A-Bmm) WDLK Series			WDLX 系列 (A-Bmm) WDLX Series		包装 (米 / 箱) Packing	
		型号 Part no.	6-8	8-12	10-12	型号 Part no.		4-6
	20					WDLX-3020	•	100
30	25					WDLX-3025	•	100
	35					WDLX-3035	•	100
35	35					WDLX-3535	•	100
40	25	WDLK-4025	•			WDLX-4025	•	100
	40	WDLK-4040	•			WDLX-4040	•	80
	60	WDLK-4060	•			WDLX-4060	•	64
50	25	WDLK-5025	•			WDLX-5025	•	100
	35	WDLK-5035	•			WDLX-5035	•	100
	*45	WDLK-5045	•			WDLX-5045	•	80
	50	WDLK-5050	•			WDLX-5050	•	80
	60	WDLK-5060	•			WDLX-5060	•	64
60	80	WDLK-5080	•			WDLX-5080	•	48
	25	WDLK-6025	•			WDLX-6025	•	80
	40	WDLK-6040	•			WDLX-6040	•	64
	60	WDLK-6060	•			WDLX-6060	•	48
65	80	WDLK-6080	•			WDLX-6080	•	36
	33	WDLK-6533	•			WDLX-6533	•	80
	45	WDLK-6545	•			WDLX-6545	•	80
80	65	WDLK-6565	•			WDLX-6565	•	48
	25	WDLK-8025		•		WDLX-8025	•	60
	35	WDLK-8035		•		WDLX-8035	•	60
	40	WDLK-8040		•		WDLX-8040	•	48
	45	WDLK-8045		•		WDLX-8045	•	48
	50	WDLK-8050		•		WDLX-8050	•	48
	60	WDLK-8060		•		WDLX-8060	•	36
	80	WDLK-8080		•		WDLX-8080	•	36
	100	WDLK-80100		•		WDLX-80100	•	24
	120	WDLK-80120		•		WDLX-80120	•	24
100	35	WDLK-10035		•		WDLX-10035	•	48
	40	WDLK-10040		•		WDLX-10040	•	48
	50	WDLK-10050		•		WDLX-10050	•	48
	60	WDLK-10060		•		WDLX-10060	•	36
	80	WDLK-10080		•		WDLX-10080	•	24
	100	WDLK-100100		•		WDLX-100100	•	24
	120	WDLK-100120		•		WDLX-100120	•	24

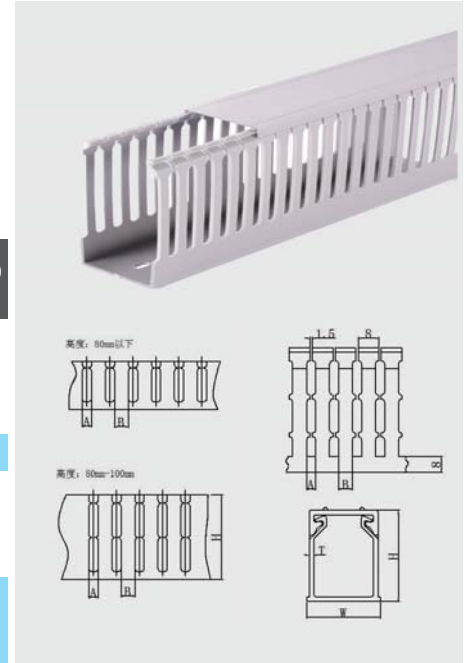

材质：聚碳酸酯 + 工程塑料，不含卤素，低烟环保绝缘材料，超耐温性能，具电气及消防安全性

Material: PC+ABS, halogen free, low smoke, RoHS compliant. Insulating material, electrical safety, fire safety.

颜色：灰色

Colour: Grey

温度：-40°C~+90°C

Temperature range: -40°C~+90°C

阻燃等级：UL94-V0

Flame-retardant: UL94-V0

特性：槽体与槽盖配合而成，组合容易，不脱落，接合面平滑不伤手。槽身两侧出线孔对称，可确保截面光洁、整齐、不擦损电线。齐全的尺寸及多样化的侧孔及安装孔设计，方便选型，易于配线。槽盖上独特的标记线设计，可使配线标识明确，快捷美观。

Properties: Consist of base and cover, easy and firm snap-on assembly, smooth joining for a better finish. With aligned slot, smooth corners and edges will not damage or disfigure wires. All sides and versatile mounting holes, easy to install and disassembly. Special mark line design on the cover can allow a quick tag of relevant components.