


防滑型线槽

Non-slip duct



H (mm)	W (mm)	WDNK 系列 (A-Bmm) WDNK Series			WDNX 系列 (A-Bmm) WDNX Series		包装 (米 / 箱) Packing	
		型号 Part no.	6-8	8-10	10-10	型号 Part no.		4-6
	20					WDNX-3020	•	100
30	25					WDNX-3025	•	100
	35					WDNX-3035	•	100
35	35					WDNX-3535	•	100
40	25	WDNK-4025	•			WDNX-4025	•	100
	40	WDNK-4040	•			WDNX-4040	•	80
	60	WDNK-4060	•			WDNX-4060	•	64
50	25	WDNK-5025	•			WDNX-5025	•	100
	35	WDNK-5035	•			WDNX-5035	•	100
	*45	WDNK-5045	•			WDNX-5045	•	80
	50	WDNK-5050	•			WDNX-5050	•	80
	60	WDNK-5060	•			WDNX-5060	•	64
60	80	WDNK-5080	•			WDNX-5080	•	48
	25	WDNK-6025	•			WDNX-6025	•	80
	40	WDNK-6040	•			WDNX-6040	•	64
	60	WDNK-6060	•			WDNX-6060	•	48
65	80	WDNK-6080	•			WDNX-6080	•	36
	33	WDNK-6533	•			WDNX-6533	•	80
	45	WDNK-6545	•			WDNX-6545	•	80
80	65	WDNK-6565	•			WDNX-6565	•	48
	25	WDNK-8025	•			WDNX-8025	•	60
	35	WDNK-8035	•			WDNX-8035	•	60
	40	WDNK-8040	•			WDNX-8040	•	48
	45	WDNK-8045	•			WDNX-8045	•	48
	50	WDNK-8050	•			WDNX-8050	•	48
	60	WDNK-8060	•			WDNX-8060	•	36
	80	WDNK-8080	•			WDNX-8080	•	36
100	100	WDNK-80100	•			WDNX-80100	•	24
	120	WDNK-80120	•			WDNX-80120	•	24
	35	WDNK-10035	•			WDNX-10035	•	48
	40	WDNK-10040	•			WDNX-10040	•	48
	50	WDNK-10050	•			WDNX-10050	•	48
	60	WDNK-10060	•			WDNX-10060	•	36
	80	WDNK-10080	•			WDNX-10080	•	24
100	WDNK-100100	•			WDNX-100100	•	24	
120	WDNK-100120	•			WDNX-100120	•	24	

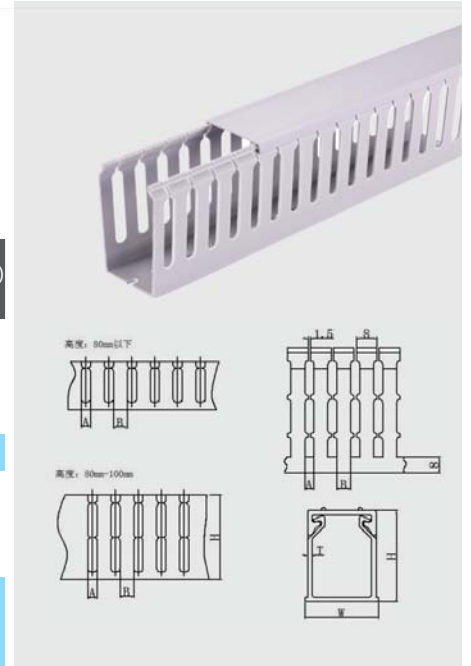

材质：采用环保硬质 PVC，进口助剂，耐候性、机械性能佳，内部采用弹性高分子防滑材料共挤加工
Material: Manufactured with High quality rigid PVC, RoHS compliant.

颜色：灰色(白色、蓝色、黑色等可特殊定制)

Colour: Grey(White, Blue and Black colors are available)

温度：-20°C~+80°C

Temperature range: -20°C~+80°C

阻燃等级：UL94-V0

Flame-retardant: UL94-V0

特性：盖板内侧共挤防滑条设计，安装便捷，任意角度不脱落。侧齿中设分割，易于线束纵向布置，整齐美观。底孔设计多样化，易于安装，方形侧孔，适用于电缆布线，截面美观。

Properties: The inner side of the cover plate of the co-extruded non-slip design, easy to install, does not fall off at any angle. Side of the tooth lateral teeth arranged in spaced, easy wiring harness longitudinal arrangement, neat appearance. Bottom hole to diversify the design, easy to install, square side hole, suitable for cable wiring, section appearance.